



AREAS OF APPLICATION

- Commercial Environments, Museum
- Living Room, offices, conference rooms
- Retail, Shopping Mall and Hospital

PRODUCT BENEFITS

- Edge-lit with LCD backlight technology and very slim aluminium housing
- Energy saving: High system efficacy with lower power consumption
- Elegant design with Anti-glare lens and exclusive design
- High quality heat sink preserves the life span of your product
- Aluminium body with Integrated PMMA front material and Fast activation function

PRODUCT FEATURES

- Type of protection: IP20
- Long lifetime: up to 35,000h
- Heat sink: Aluminium Alloy
- Cutout Ø: 150mm

TECHNICAL DATA

Electrical data

Rated power	18W
Operating voltage	AC 85-265 V
Operating frequency	50/60Hz
Power factor	0.90

Photometrical data

Color temperature	2700-6500K
Luminous flux	1845±10%lm
Color rendering index Ra	80

Light Technical Data

Beam angle	120°
------------	------

Dimensions

Diameter	Ø175mm
Height	32mm

Temperature & operating conditions

Ambient Temperature	-15° ~ +50°
---------------------	-------------


General information

Mounting type	Recessed Mount
LED type	LED SMD
Lifespan	35,000h



SPECIFICATION				
MODEL	LUMINOUS EFFICIENCY	POWER	IP RATING	DIMMABLE
CLXS6C	103lm/W	18W	20	NO

TECHNICAL DRAWING

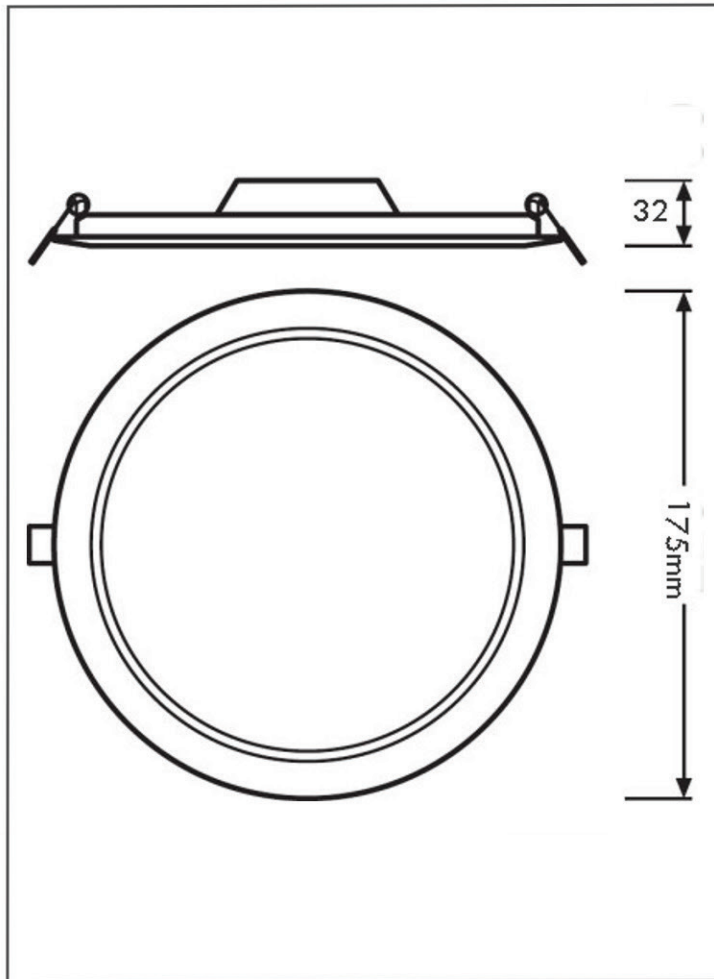

PHOTOMETRIC CURVE

